

PAC Brand Tools

Manual Tools for Plastic Strapping

PAC brand tools are tough, durable, and priced very competitively, making them an exceptional value. The PST34 is an industry standard and is the preferred tool for regular duty applications. The PST-HD is a heavy-duty cast tool for both polypropylene and polyester, and the SJ series tools are a cost effective alternative for high strength polyester. All PAC brand tools are covered by a 30 day warranty and are backed by a complete parts inventory and our service department.

Manual Tensioners

PRODUCT	STRAP SIZE (inches)	STRAP TYPE	APPLICATION	SHIPPING WGT. (lbs.)
DLT-PAC	to 3/4	All Plastic	Buckle Tensioner	2
HPT58	to 5/8	All Plastic	Hand Pull	1
PST34	to 3/4	All Plastic	General Use	3
PST-HD	to 3/4	All Plastic	Heavy Duty	4
TX-114	to 1 1/2	All Plastic	Extreme Tension	7
PST-PET	to 3/4	Polyester	Regular Duty	3
PST-CORD	to 3/4	Cord	General Use	3


Manual Sealers

PRODUCT	STRAP SIZE (inches)	STRAP TYPE	APPLICATION	SHIPPING WGT. (lbs.)
Regular Duty 13" Handles				
ES48	1/2	All Plastic	General Use	3
ES58	5/8	All Plastic	General Use	3
ES68	3/4	All Plastic	General Use	3
Heavy Duty 17" Handles				
ES48L	1/2	All Plastic	Heavy Duty	4
ES48SJ*	1/2	All Plastic	Heavy Duty High Joint Strength	4
ES58L	5/8	All Plastic	Heavy Duty	4
ES58SJ*	5/8	All Plastic	Heavy Duty High Joint Strength	4
ES68L	3/4	All Plastic	Heavy Duty	4


Manual Combination Tools

PRODUCT	STRAP SIZE (inches)	STRAP TYPE	APPLICATION	SHIPPING WGT. (lbs.)
PAC400HD*	1/2	All Plastic	Single Feed High Joint Strength	9
PAC500HD*	5/8	All Plastic	Single Feed High Joint Strength	9

* Designed for use with S-4CT and S-5CT seals

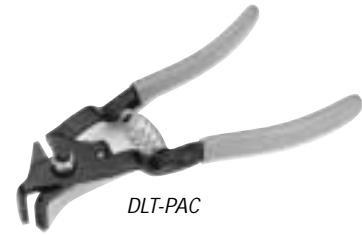

DLT-PAC

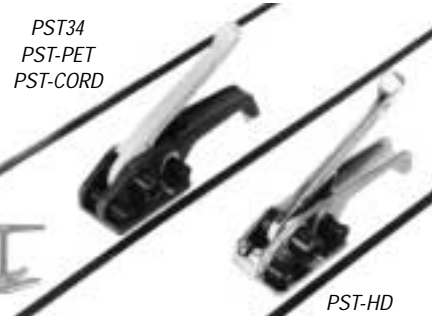

PST34
PST-PET
PST-CORD

HPT58

PST-HD




TX114



ES48
ES58
ES68



ES48L
ES58L
ES68L

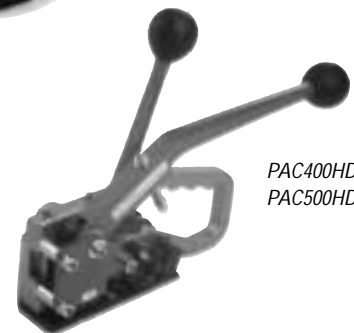

PAC400HD
PAC500HD



Power Tools for Plastic Strapping

Cyklop International Brand Tools

Cyklop International has been manufacturing quality tools and strapping products for over 90 years. PAC is honored to represent their latest innovations in powered tools for plastic strapping. These tools, manufactured in Germany, are the finest tools available in the market...at any price.

Battery Powered Tools

CB130

The CB130 is a battery powered combination tool that tensions, seals and cuts the strap. It's the first completely automatic tool that does not require a 2-stage operation. Utilizing the latest in Nickel Metal Hydride battery technology, the CB130 delivers strapping power to the job, and is not tethered to an air line, or a power outlet. The CB130 is exceptionally flexible for a wide range of strap. It handles both Polyester and Polypropylene, automatically adjusts for strap thickness, and a simple adjustment is all that's needed for different strap widths.

The CB130 can be ordered with the following standard options: tool balancer, suspension bracket, heavy duty bottom plate, and a "cold weather" battery.

TECHNICAL SPECIFICATIONS

Weight:	9.5 lbs.
Seal Joint:	Friction (Rated at 70-80% joint efficiency)
Tension Capability:	300 lbs.
Strap Width:	9mm to 19mm (3/8" to 3/4") field adjustable
Strap Thickness:	.5mm to 1.2mm (.020" to .048")
Battery Technology:	Bosch 14.4 Volt
	180 operations per charge (average)
	2000 recharges per battery
Charge Time:	38 minutes (approximate)



CB130

CL100

The CL100 is a manual windlass tensioner, with a battery powered sealing mechanism. It is exceptionally light, and can handle both Polyester and Polypropylene. The CL100 automatically adjusts for strap thickness, and can be field adjusted for changes in width. Easy to thread, it delivers exceptional joint efficiency with a friction seal. The CL100 is an excellent alternative to high priced combination tools utilizing expensive seals.

TECHNICAL SPECIFICATIONS

Weight:	6.5 lbs.
Seal Joint:	Friction (Rated at 70-80% joint efficiency)
Tension Capability:	Manual
Strap Width:	8mm to 13mm (3/8" to 1/2")
Strap Thickness:	.4mm to .6mm (.016" to .024")
Battery Technology:	NiCd (Nickel Cadmium) 9.6 Volt
	325 operations per charge
	2000 recharges per battery
Charge Time:	60 minutes (approximate)



CL100

Pneumatic (Air Powered) Tools

CP98

The CP98 is a pneumatic tensioner and sealer designed for maximum tension and heavy-duty applications. Although the CP98 is designed for Polyester, it also works with heavy duty Polypropylene. It pulls the highest tension in the industry, but at 13 lbs, it is the lightest high tension tool available. The CP98 delivers outstanding joint strength, and is designed for rigorous applications that require maximum durability.

TECHNICAL SPECIFICATIONS

Weight:	13 lbs.
Seal Joint:	Friction (Rated at 70-80% joint efficiency)
Tension Capability:	950 lbs.
Strap Sizes:	12mm (1/2") x .9mm - 1.12mm (.035" - .044")
	16mm (5/8") x .7mm - .8mm (.028" - .031")
	16mm (5/8") x .9mm - 1.12mm (.035" - .044")
	19mm (3/4") x .9mm - 1.12mm (.035" - .044")
	The CP98 must be specified for width and thickness when ordering.
Air Requirements:	Maximum 95 PSI (Operating range 58 - 91 PSI)
Air Connection:	G1/4" Air must be supplied with a service unit of filter, regulator and oiler. Hose length maximum is 16', and hose diameter must be 10mm (.39") or greater.



CP98


Electric Powered Tools

CE92

The CE92 is an electric combination tool that tensions, seals, and cuts the strap. No seals are required. Designed for applications where a power outlet is readily available, the CE92 delivers consistently high tension, secure seals, and proven reliable performance. The CE92 works with both Polypropylene and Polyester. This tool can also be used on round bundles by ordering an optional base plate. When equipped with the optional plate, the CE92 is designated CE92R, and the base plate decreases from 4.7" to 3.5".

TECHNICAL SPECIFICATIONS

Weight:	10 lbs.
Seal Joint:	Friction (Rated at 70-80% joint efficiency)
Tension Capability:	360 lbs. with standard spring
	450 lbs. with optional spring
Strap Width:	9mm to 19mm (3/8" to 3/4")
Strap Thickness:	.5mm to 1.2mm (.020" to .048")
	The CE92 must be specified for width and thickness when ordering.
Power Requirements:	110 Volt, 50/60 Hz

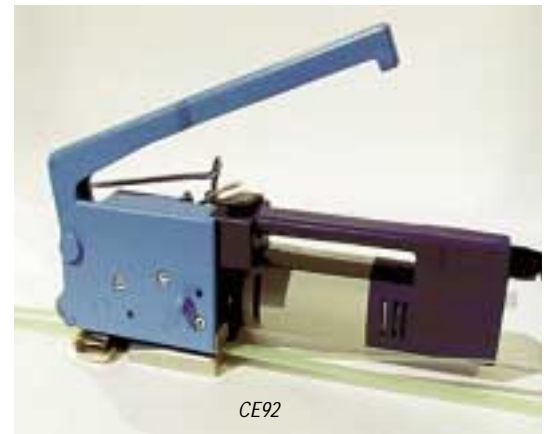

CE92

Orgapack Tools

Orgapack tools are manufactured in Switzerland by one of the world's foremost strapping tool manufacturers. Their feature outstanding quality, and are backed by an extensive parts inventory and our own service department.

Manual Tensioners

PRODUCT	STRAP SIZE (inches)	STRAP TYPE	APPLICATION	SHIPPING WGT. (lbs.)
PT00	to 3/4	Polypropylene	General Use	4
PT00-GR	to 3/4	All Plastic	General Use	4



Manual Sealers

PRODUCT	STRAP SIZE (inches)	MAXIMUM GAUGE	STRAP TYPE	APPLICATION	SHIPPING WGT. (lbs.)
Regular Duty 14" Handles					
PS38	3/8	.023	Polypropylene	General Use	4
PS48	1/2	.023	Polypropylene	General Use	4
PS58	5/8	.023	Polypropylene	General Use	4
PS68	3/4	.031	Polypropylene	General Use	4
PS48SJ*	1/2	.028	All Plastic	High Joint Strength	4
PS58SJ*	5/8	.028	All Plastic	High Joint Strength	4
Heavy Duty 18" Handles					
PS48L	1/2	.040	Polypropylene	Heavy Duty	5
PS58L	5/8	.040	Polypropylene	Heavy Duty	5
PS68L	3/4	.040	Polypropylene	Heavy Duty	5
PS48SJL*	1/2	.028	All Plastic	Heavy Duty High Joint Strength	5
PS58SJL*	5/8	.028	All Plastic	Heavy Duty High Joint Strength	5
PS58SJL-HD*	5/8	.040	All Plastic	Heavy Duty High Joint Strength	5



Manual Combination Tools

PRODUCT	STRAP SIZE (inches)	STRAP TYPE	RECOMMENDED SEAL	SHIPPING WGT. (lbs.)
CT48	1/2	All Plastic	S-4CT, S-4CT-PAC	6
CT48HD	1/2	All Plastic	S-4CT, S-4CT-PAC	9
CT58	5/8	All Plastic	S-5CT, S-5CT-PAC	9
MT48	1/2	All Plastic	CCP-481, CMP-451	11
MT48HD	1/2	All Plastic	CMP-464	11
MT58	5/8	All Plastic	CMP-564	11

* Designed for use with S-4CT and S-5CT seals

